

## MYLE™

### Heavy Duty Cargo Trailer.

Move Your Load Easily & safely with this stable MYLE™ heavy duty cargo trailer.

Can be used with most regular bikes & e-bikes and can easily transport a 200 kg load.



Hitch plate attaches to the rear of the rack of most bikes, allowing the rear rack to be used as normal, or attached to the lower rear frame of a trike.

Can be used as a hand trolley in warehouses, factories or pedestrian zones in urban areas.

Pedal Assist sensor picks up front wheel movement & activates front wheel motor.

3 hydraulic disc brakes on trailer are controlled by brake lever on bike.

Hydraulic brake hose has Quick-connect near trailer hitch to allow easy un-hitching of trailer without messy oil leaks.

A 'D' pin attaches trailer to hitch.

2 Versions: Electric or Non-Electric

Optional ramp.




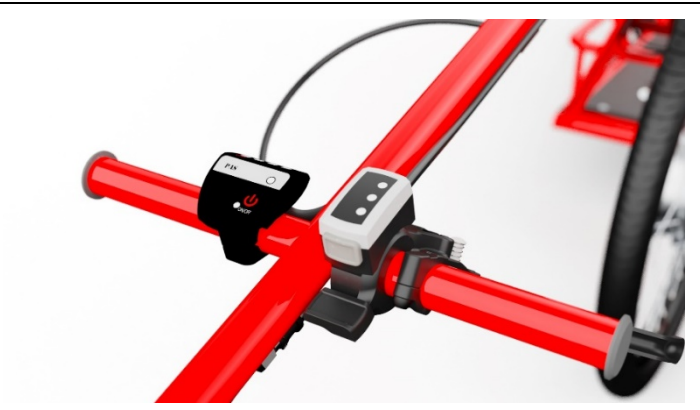
Priced from \$5950

SPECIFICATIONS:	
FRAME & STEERING ARM	AISI 4130 Cr-Mo steel tubing
FORKS	RST Dirt 26" 80mm Travel, Pre-load adjust
FRONT WHEEL	either: 24" 36 spoke with Bafang 250W motor
	24" 36 spoke with QR
	TYRE: Schwalbe Big Ben Plus 24x2.15
REAR WHEELS	HUB: Powerway 36 spoke, 15mm Thru Axle
	RIM: 20" JS-2002 Black
	TYRE: Vee Rubber VRM-015 2.75-16 43P, Max. Load: 154kg
	Disc rotor: 203mm
BRAKES	CALIPER: 4 piston forged aluminium body
	LEVER: Forged aluminium lever / Cast bracket

	4 finger ball-end lever blade	
	Parking lock mechanism	
	Quick-Connect to join hose between trailer & bike	
	Hydraulic on all 3 wheels operated by 1 lever on bike handlebars	
LOAD PLATFORM	LENGTH: 1655mm	WIDTH: 650mm
	MATERIAL: 12mm MARINE PLYWOOD	HEIGHT ABOVE GROUND: 192mm
LOAD CAPACITY	200kg	
COLOURS	RAL 3001 Signal Red	RAL 6018 Green
	RAL 1007 Safety Yellow	RAL 1013 Pearl White
	RAL 5015 Blaze Blue	RAL 9005 Jet Black
LENGTH	Rear to front wheel: 2481mm	Rear to Steering Arm attached to bike: 3308mm
WIDTH	Across frame at rear wheels: 961mm	
HEIGHT (UNLOADED)	At Steering Arm pivot: 1025mm	
WEIGHT (UNLOADED)	Electric version: 55kg	Non-Electric version: 45kg
GROUND CLEARANCE (UNLOADED)	To underside of frame: 153mm	
MOTOR	Bafang 250W Hub with movement sensor to activate motor assistance	
	Max. Speed while pedalling: 25km/h	Max. Speed using throttle: 6km/h
THROTTLE	Positioned on Steering Arm & bike handlebars	
BATTERY	36V 28Ah 1kWh	Panasonic cells
CHARGER	36V 2Ah	Charge time from empty: 6 hrs
RANGE *	~70km with no load	~40km with full load
OPTIONS	Indicators	Rear Supports
	Electric	Ramp
	Non-Electric	
WARRANTY	2 years for frame, forks & wheels	1 year for 36V battery

\*Actual range depends on many factors such as the steepness of the terrain, headwinds, weight of load

## FEATURES:

<p><b>WHEELS</b></p> <p>4 piston hydraulic brake calipers. 203mm disc rotors. 15mm Thru axle.</p>	
<p><b>BRAKE HOSE</b></p> <p>Quick Connect hydraulic brake hose</p>	
<p><b>FORKS</b></p> <p>RST Dirt forks, 80mm travel. (Electric version shown)</p>	
<p><b>PEDAL ASSIST</b></p> <p>Pedal Assist display/On/Off &amp; Throttle</p>	

### REAR OF TRAILER

Rear lights.  
Optional Indicators.  
Tie-down anchor track.  
Rubber buffers to allow vertical storage of trailer.



### Battery Case

Battery is enclosed in weatherproof lockable case



### Optional Rear Supports

Rear supports to help stop the trailer tipping when loading heavy items or standing on platform.




### Optional Ramp

Ramp allows easy loading & unloading of cargo.



Bike rear rack hitch mount.

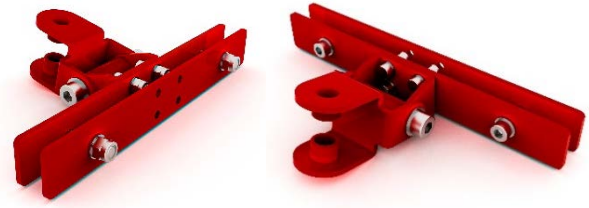

Trike rear hitch mount.



## Dimensions

